


Certificate number TÜV IT 16 ATEX 063 X  
Marking: II 1/2 D Ex ta/Ib IIC T85°C IP65 Da/Db

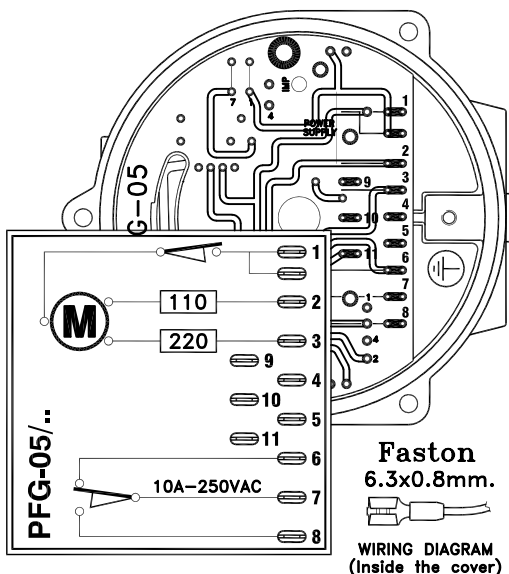

IP65 Protection

### WIRING

- 1 - Common power supply
- 2 - Power supply 110 Va.c. 50/60 Hz
- 3 - Power supply 220 Va.c. 50/60 Hz
- 6 - NC contact 10A/250 Va.c.
- 7 - Common contacts
- 8 - NO contact 10A/250 Va.c.

Ambient temperature range  $-20$  to  $+70$  °C

Weight : AT/F 2.800 Kg - AT 3.000 Kg

On request power supply at 24/48 Va.c. 50/60 Hz or power supply at 24 Vd.c.

Electric motor draw 4 W

Maximum operational pressure 1.1 bar

Max. temperature inside storage bin  $200$  °C