


Declaration of Conformity CL 20 ATEX 0705  
Marking: II 3D Ex tc IIB T135°C Dc

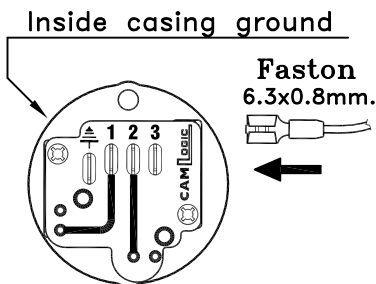

Die-cast aluminium casing UNI5076

Sleeve and float in Stainless Steel 18/10

Articulation covering manufactured in rubber

Horizontal assembly with sleeve

Wiring with antivibrations cable terminals (Faston)

Ambient temperature range -10 to +100 °C

Weight : 1.650 Kg Max pressure 25 bar

Protection IP65



WATERPROOFING IS 100 % GUARANTEED – THE FLOAT MOVEMENT IS TRANSMITTED BY MEANS OF MAGNETIC INDUCTION – THERE ISN'T ANY LIQUID PASSAGE BETWEEN THE TANK AND THE GAUGE INNER PART.