


Ø1/2" Gas Outside casing ground




Die-cast aluminium casing UNI5076


Standard AC1 1 vane NYLON screw.

Wiring with antivibrations cable terminals (Faston).


SLEEVE



Inside casing ground

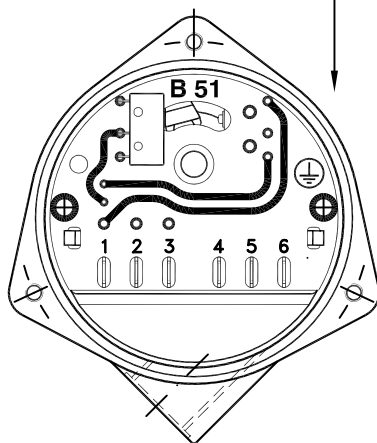

Faston 6.3x0.8mm.



WIRING

- 1 - Common power supply
- 2 - Power supply 110 Va.c. 50/60 Hz
- 3 - Power supply 220 Va.c. 50/60 Hz
- 4 - NC contact 5A/250 Va.c.
- 5 - Common contacts
- 6 - NO contact 5A/250 Va.c.

Electric motor draw 4 W

Ambient temperature range -20 to +70 °C

Weight : 1.200 Kg

On request power supply at 24/48 Va.c. 50/60Hz - And also at 24 Vd.c.

IP65 Protection

Maximum operational pressure 1.1 bar

SMALL-SIZED BLADED LEVEL GAUGE PARTICULARLY SUITABLE FOR USE ON SMALL TANKS OR BATCHING CELLS.

ASSEMBLY WITH 3/4" GAS THREADED SLEEVE

Certificate number TÜV IT 13 ATEX 070  
Marking: II 1/2 D Ex ta/tb IIC T85°C Da/Db

