

## LEVEL INDICATOR PFG06

Product Line: **Capacitive**

Capacitive level indicator without moving mechanical parts. Version with male thread 1"1/2 Gas and electrical connection via faston anti-vibration.

### ADVANTAGES

- An **EASY TO INSTALL** instrument that does not require any calibration, maintenance or specific tool for its installation. It comes with a standard calibration that allows the indicator to perceive the material at a distance of about 1 cm from the probe (it may vary slightly between one material and another). By using the internal adjustment trimmer it is possible to increase the sensitivity or decrease it, thus varying the intervention distance from the probe.
- Extremely **VERSATILE**, it can be installed on tanks, hoppers, on walls or roofs of silos, in a vertical, horizontal or oblique position.
- **CUSTOMIZABLE** with extensions, fixing, voltages.



Solids




ATEX CERTIFICATE FOR DUST ZONE 20/21

# LEVEL INDICATOR PFG06


Product Line: Capacitive



Solids

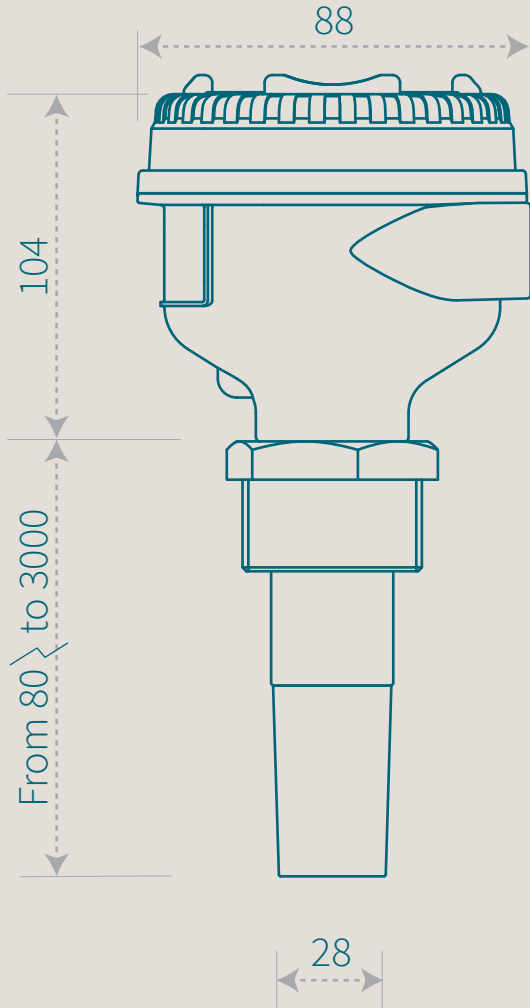

## Customizations



110/220VAC

110/220 V AC



24/48VAC

24/48 V AC



24VDC

24 V DC

Lamp



220VAC



110VAC




48VAC




24VAC




24VDC



Tri-Clamp



Aluminium Flange  
1"1/2Gas



Iron sleeve  
sleeve 1"1/2Gas



Stainless steel shaft extension  
with protection from 80 to 3000 mm

